


Design, rate, and simulate heat transfer equipment

Xchanger Suite includes components for the design, rating, and/or simulation of

- heat exchangers
 - air coolers and economizers (Xace)
 - shell and tube (Xist)
 - hairpin (Xhpe)
 - jacketed pipes (Xjpe)
 - plate and frame (Xphe)
 - spiral plate (Xspe)
- fired heaters (Xfh)

...plus additional components for tube layout and vibration analysis

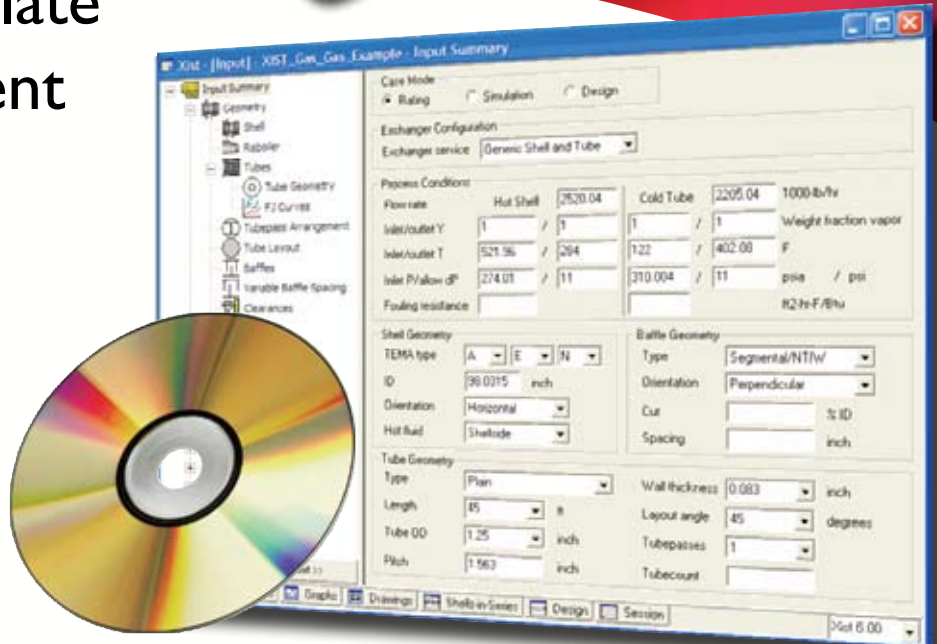

HTRI Xchanger Suite, from the global leader in process heat transfer and heat exchanger technology, includes components for heat transfer and associated calculations of heat exchangers and fired heaters. HTRI's calculation methods are backed by 50 years of extensive research and data collected on industrially relevant heat transfer equipment. Based on the results of this ongoing effort, we update our methods to meet your evolving engineering needs.

All Xchanger Suite components are highly flexible, allowing rigorous specification of the exchanger geometry. This capability makes the best use of HTRI's proprietary heat transfer and pressure drop correlations and allows the most accurate performance predictions possible for all exchangers.

Features

- Calculation modules are fully incremental and calculate localized heat transfer and pressure drop using local fluid properties
- Suite includes VMGThermo™, an extensive and rigorous fluid physical property generator
- Extensive output reports provide detailed results including local profiles of all important parameters
- Comprehensive online help provides background information, graphs, explanation of input panels and output reports, user tips, and more
- Graphs and scale drawings provide in-depth visualization of calculated results
- Quick Calc tools let you easily perform unit conversions and select exchanger types
- Interfaces to
 - process simulators
 - physical property databanks
 - mechanical design programs
 - integrated engineering software
 - Microsoft® Excel®
 - CAPE-OPEN compliant applications

Now imports files from HTFS™, Honeywell's UniSim® Shell-Tube Exchanger Modeler, and Aspen Shell & Tube Exchanger.



Design, rate, and simulate virtually any type of shell-and-tube exchanger including kettles, hairpins, thermosiphons, tubeside reflux condensers, and falling film evaporators. **Xist** includes support for all standard TEMA types, integrated flow-induced vibration calculations, and tube layout tools.



Design, rate, and simulate air coolers and economizers including natural draft (fans off) and forced draft conditions. **Xace** includes vendor fan selection calculations and options to simulate the effect of flow and temperature maldistribution.



Simulate the performance of cylindrical and box heaters. **Xfh** uses a Hottel zoning method to calculate localized radiant and process side performance. Additional combustion and convection section modules allow evaluation of a complete process fired heater.









Design, rate, and simulate plate-and-frame exchangers using user-defined plate types or plates selected from an internal manufacturers' databank. **Xphe** contains a port maldistribution model that calculates the flow through each plate channel.



Rate and simulate single-phase spiral plate exchangers using an incremental model with HTRI-validated heat transfer and pressure drop correlations. **Xspe** models co- and countercurrent spiral flow (Type I exchangers).



Calculate flow-induced vibration for a tube in a shell-and-tube exchanger using a rigorous finite element based algorithm. **Xvib** considers fluidelastic instability and vortex shedding mechanisms for both plain and U-tubes.

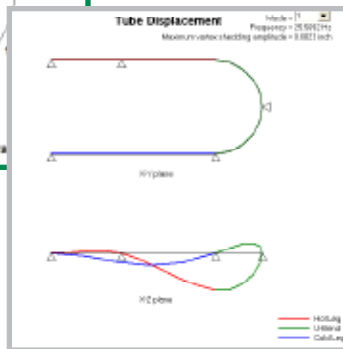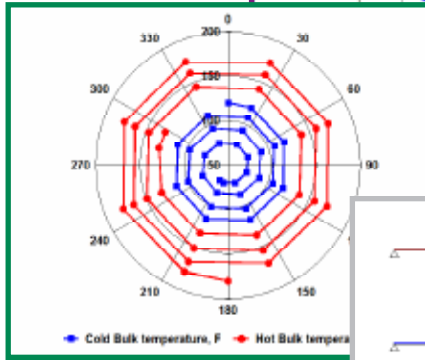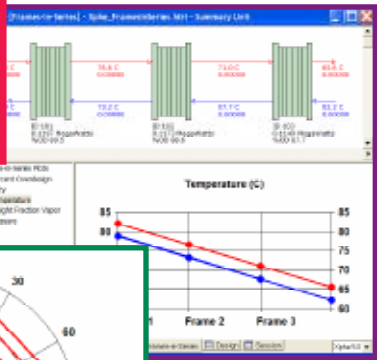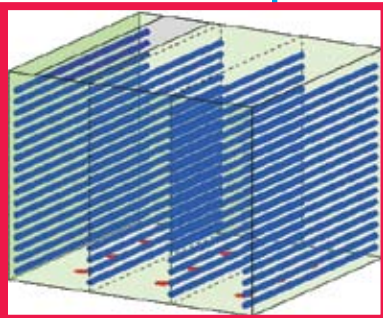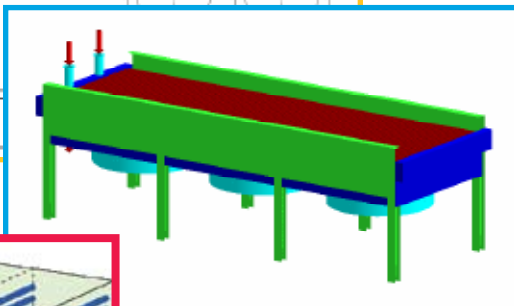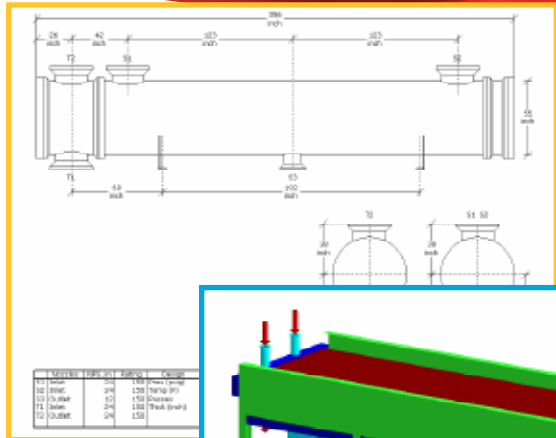

Heat Transfer Research, Inc.
150 Venture Drive
College Station, Texas 77845 USA

+1.979.690.5050 voice
htri@htri.net
www.htri.net



System Requirements and Recommendations

Xchanger Suite requires Microsoft Windows 2000 or later running on an Intel Pentium or compatible CPU with at least 128 MB RAM (512 MB for Windows Vista, Windows Server 2008, or Windows 7), and approximately 425 MB of free disk space for a complete installation.

HTRI recommends a 1GHz or faster processor, 1 GB RAM, the Windows XP operating system, and a graphics resolution of at least 1024 x 768.



"VMGThermo" is a trademark of Virtual Materials Group, Inc. "Honeywell" and "UniSim" are trademarks of Honeywell International, Inc. "HTFS" and "Aspen Shell & Tube Exchanger" are trademarks of Aspen Technology, Inc. "HTRI", the HTRI logo, "Xchanger Suite", "Xace", "Xfh", "Xhpe", "Xist", "Xjpe", "Xphe", "Xspe", "Xtlo", and "Xvib" are trademarks of Heat Transfer Research, Inc. These marks may be registered in some countries.